

Dairy 5K UF Membrane

Product Description

Membrane material: PES

MWCO: 5000D

Outer wrap: Net

Application: Protein removal

Spacer: 31/46/65 mil

Feature: Conform to 3A Standard

Product Specifications


Model	Spacer (mil)	Membrane area (ft ² /m ²)	Outer wrap
3838	31	75 (7.0)	Net
	46	60 (5.6)	
6338	31	205 (19)	Net
	46	165 (15.3)	
	65	125 (11.6)	
8038	31	310 (32.5)	Net
	46	260 (24.2)	
	65	210 (19.5)	
8338	31	410 (38.1)	Net
	46	319 (29.6)	
	65	243 (22.6)	

Remark: Special ATD is required for each membrane.

Operating and Design Information

Typical Operating Pressure	80-135psi
Maximum Operating Pressure	200psi
Maximum Temperature	Continuous Operation: 50°C
	Chemical Cleaning(CIP): 85°C
Allowable pH	Continuous Operation: 2-10
	Chemical Cleaning(CIP): 2-11.5
Maximum Pressure Drop	<15psi
Chlorine Tolerance	5000ppm/day

Nominal Dimensions

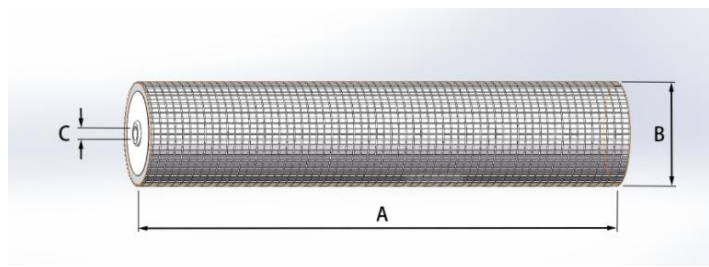

Products	Dimensions-(in/mm)		
	A	B	C
Dairy-5K-3838-31/46-C0830	38 (965)	3.8 (97)	0.83 (21)
Dairy-5K-6338-31/46/65-C-1139	38 (965)	6.3 (160)	1.139 (28.9)
Dairy-5K-8038-31/46/65-C-1139	38 (965)	7.9 (200)	1.139 (28.9)
Dairy-5K-8338-31/46/65-C-1139	38 (965)	8.3 (211)	1.139 (28.9)

Dairy 10K UF Membrane

Product Description

Membrane material: PES

MWCO: 10000D

Outer wrap: Net

Application: Protein removal

Spacer: 31/46/65 mil

Feature: Conform to 3A Standard

Product Specifications


Model	Spacer (mil)	Membrane area (ft ² /m ²)	Outer wrap
3838	31	75 (7.0)	Net
	46	60 (5.6)	
6338	31	205 (19)	Net
	46	165 (15.3)	
	65	125 (11.6)	
8038	31	310 (32.5)	Net
	46	260 (24.2)	
	65	210 (19.5)	
8338	31	410 (38.1)	Net
	46	319 (29.6)	
	65	243 (22.6)	

Remark: Special ATD is required for each membrane.

Operating and Design Information

Typical Operating Pressure	80-135psi
Maximum Operating Pressure	200psi
Maximum Temperature	Continuous Operation: 50°C
	Chemical Cleaning(CIP): 85°C
Allowable pH	Continuous Operation: 2-10
	Chemical Cleaning(CIP): 2-11.5
Maximum Pressure Drop	<15psi
Chlorine Tolerance	5000ppm/day

Nominal Dimensions

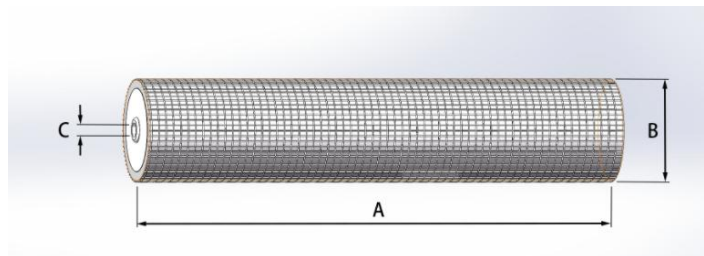

Products	Dimensions-(in/mm)		
	A	B	C
Dairy-10K-3838-31/46-C-0830	38 (965)	3.8 (97)	0.83 (21)
Dairy-10K-6338-31/46/65-C-1139	38 (965)	6.3 (160)	1.139 (28.9)
Dairy-10K-8038-31/46/65-C-1139	38 (965)	7.9 (200)	1.139 (28.9)
Dairy-10K-8338-31/46/65-C-1139	38 (965)	8.3 (211)	1.139 (28.9)

Important information

- New spiral membranes must be cleaned prior to first use. The cleaning procedure should be in accordance with the instructions provided in the HMCT cleaning description for the spiral membrane concerned.
 - The customer is fully responsible for the effects that any incompatible chemicals may have on the spiral membranes.
 - After initial wetting, the spiral membranes must be kept moist at all times.
 - If the operating specifications provided in this product description are not strictly followed, the limited warranty will be null and void.
 - To prevent biological growth during system shutdowns, HMCT recommends that spiral membranes should be immersed in a protective solution.
 - Avoid permeate-side back pressure at all times.
 - HMCT recommends using a rigid stainless steel ATD end device at the housing outlet end.
 - HMCT recommends that the inner diameter of the housing should be approx. 2 mm (0.08") bigger than the outer diameter of the spiral membrane.
 - For storage conditions, please see Storage document.
 - For warranties, please see spiral membrane warranty document.
-

Operating guidelines

HMCT recommends the following start-up procedure from standstill to operating condition:

- The unpressurized plant should be refilled with water.
 - Feed pressure should be gradually increased over a 30 – 60 second time scale.
 - Before initiating cross-flow at high permeate flux condition (start-up with high-temperature water) the set feed pressure should be maintained for 5 – 10 minutes.
 - Cross-flow velocity at the set operating point should be gradually achieved over a period of 15 – 20 seconds.
 - Temperature variations should be implemented gradually over a period of 3 – 5 minutes.
 - Avoid any abrupt pressure or cross-flow variations on the membranes during start-up, shutdown, cleaning or other sequences in order to prevent possible damage.
-

