

## Product Description

|                   |                                                                |
|-------------------|----------------------------------------------------------------|
| Membrane material | TFC polyamide                                                  |
| Outer wrap        | Net                                                            |
| Application       | Concentration of whey, skim or whole milk, UF permeate/lactose |
| Feature           | Conform to 3A Standard                                         |

## Membrane Characteristics

| Product   | Water Flux(LMH) | Salt Rejection(MgSO <sub>4</sub> ) | Salt Rejection(NaCl) |
|-----------|-----------------|------------------------------------|----------------------|
| Dairy-RO2 | 35              | /                                  | ≥98.5%               |

Test Condition: 1) 2,000 ppm NaCl, 225 psi ( 15.5 bar ), 77°F (25°C), 15% recovery.

2) The flux of one element may vary in the range of ± 25%.


## Product Specifications

| Product | Membrane area (ft <sup>2</sup> /m <sup>2</sup> ) |               |               |
|---------|--------------------------------------------------|---------------|---------------|
|         | Spacer 30 mil                                    | Spacer 45 mil | Spacer 62 mil |
| 8040    | 370 (34.4)                                       | 295 (27.4)    | 210 (19.5)    |
| 8038    | 370 (34.4)                                       | 295 (27.4)    | 210 (19.5)    |
| 6338    | 231 (21.5)                                       | 186 (17.3)    | 136 (12.6)    |
| 3840    | 80 (7.5)                                         | 65 (6.0)      | 46 (4.3)      |
| 3838    | 80 (7.5)                                         | 65 (6.0)      | 46 (4.3)      |

## Operating and Design Information

|                            |                                                                         |
|----------------------------|-------------------------------------------------------------------------|
| Typical Operating Pressure | 150 -350 psi (10.3 - 24.1 bar)                                          |
| Maximum Operating Pressure | 600 psi (41.4 bar)                                                      |
| Maximum Temperature        | Continuous Operation: 50°C(122°F)<br>Clean-In-Place(CIP): 60°C(140°F)   |
| Allowable pH               | Continuous Operation: 2-10<br>Clean-In-Place(CIP): 1.8-11               |
| Maximum Pressure Drop      | 15 psi (1.0 bar) Per Element<br>60 psi (4.1 bar)Per Vessel(4 in series) |

## Nominal Dimensions

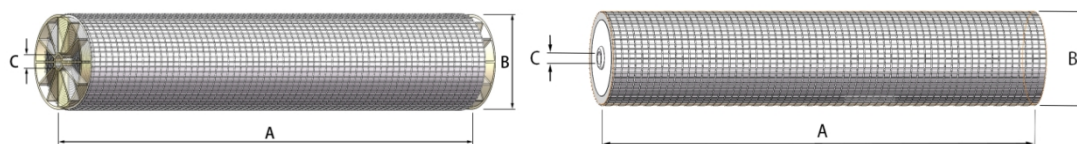

| Products                       | Dimensions-(in/mm) |            |              |
|--------------------------------|--------------------|------------|--------------|
|                                | A                  | B          | C            |
| Dairy-RO2-8040-30/45/62-C-1125 | 40(1016)           | 7.9(200.7) | 1.125(28.58) |
| Dairy-RO2-8038-30/45/62-C-1125 | 38(965)            | 7.9(200.7) | 1.125(28.58) |
| Dairy-RO2-6338-30/45/62-C-1139 | 38(965)            | 6.3(160.0) | 1.139(28.93) |
| Dairy-RO2-3840-30/45/62-C-0830 | 38.8(984)          | 3.8(96.5)  | 0.830(21.08) |
| Dairy-RO2-3838-30/45/62-C-0830 | 38(965)            | 3.8(96.5)  | 0.830(21.08) |

## Important information

---

- New spiral membranes must be cleaned prior to first use. The cleaning procedure should be in accordance with the instructions provided in the MEY cleaning description for the spiral membrane concerned.
  - The customer is fully responsible for the effects that any incompatible chemicals may have on the spiral membranes.
  - After initial wetting, the spiral membranes must be kept moist at all times.
  - If the operating specifications provided in this product description are not strictly followed, the limited warranty will be null and void.
  - To prevent biological growth during system shutdowns, MEY recommends that spiral membranes should be immersed in a protective solution.
  - Avoid permeate-side back pressure at all times.
  - MEY recommends using a rigid stainless steel ATD end device at the housing outlet end.
  - MEY recommends that the inner diameter of the housing should be approx. 2 mm (0.08”) bigger than the outer diameter of the spiral membrane.
  - For storage conditions, please see Storage document.
  - For warranties, please see spiral membrane warranty document.
- 

## Operating guidelines

---

MEY recommends the following start-up procedure from standstill to operating condition:

- The unpressurized plant should be refilled with water.
  - Feed pressure should be gradually increased over a 30–60 second time scale.
  - Before initiating cross-flow at high permeate flux condition (start-up with high-temperature water) the set feed pressure should be maintained for 5–10 minutes.
  - Cross-flow velocity at the set operating point should be gradually achieved over a period of 15–20 seconds.
  - Temperature variations should be implemented gradually over a period of 3–5 minutes.
  - Avoid any abrupt pressure or cross-flow variations on the membranes during start-up, shutdown, cleaning or other sequences in order to prevent possible damage.
- 

